


1. [20%] During the isothermal heat addition process of a Carnot cycle, 800kJ of heat is added to the working fluid from a source at 350°C. Determine
  - (a) the entropy change of the working fluid [7%],
  - (b) the entropy change of the source [7%], and
  - (c) the total entropy generation for the process [6%].
  
2. [30%] An air standard cycle is executed in a closed system and is composed of the following four processes:
  - Process 1-2: Isentropic compression from 100kPa and 27°C to 1 MPa,
  - Process 2-3: Constant-pressure heating in amount of 2500 kJ/kg,
  - Process 3-4: Constant-volume cooling to 100kPa,
  - Process 4-1: Constant-pressure expansion to initial state.
 For air at 25°C,  $C_p=1.005$  kJ/(kg · K) and  $C_v=0.718$  kJ/(kg · K).
  - (a) Show the cycle on  $P-v$  and  $T-s$  diagrams [10%].
  - (b) Calculate the maximum temperature in the cycle [10%].
  - (c) Determine the thermal efficiency for this standard cycle [10%].
  
3. [50%] Electric power is an important worldwide issue in this century. Although there are many forms of power generation, the use of wind turbine and sea turbine are considered two promising approaches. For your information, sea turbine is very similar to wind turbine except that power is generated via sea current flow rather than the wind. This problem concerns these two sources of power generation.
  - (a) For wind turbine, the diameter of the wind turbine is  $D_w$ , freestream wind velocity  $V_w$ , and air density  $\rho_w$  (see diagram below), calculate the total power available in the wind. [8%]
  - (b) For sea turbine, the diameter of the wind turbine is  $D_s$ , freestream wind velocity  $V_s$ , and air density  $\rho_s$  (also see diagram below), calculate the total power available in the sea current. [8%]
  - (c) Is it possible to convert all available wind or sea current into electric power? From an engineering perspective, please discuss in details why or why not. [8%]
  - (d) Assuming the density of sea water is 1000 times that of air, if both the wind and the sea current have the same velocity  $V$ , what is the relationship between the diameters of the wind turbine and the sea turbine in order to generate the same power for both turbines? Please discuss in words what your answer imply for wind and sea turbine design. [8%]
  - (e) How would one calculate maximum turbine output due to available energy in the wind (or sea current)? What considerations are required? (Do not perform the calculation here, but in (f).) [10%]
  - (f) Now, perform the calculate described in step (e). [8%]

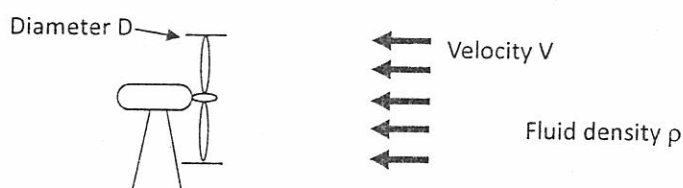

見背面

Appendix:

Table 1. Ideal gas properties of air.

T K	h kJ/kg	$P_r$	u kJ/kg	$v_r$	$s^\circ$ kJ/kg · K	T K	h kJ/kg	$P_r$	u kJ/kg	$v_r$	$s^\circ$ kJ/kg · K
200	199.97	0.3363	142.56	1707.0	1.29559	580	586.04	14.38	419.55	115.7	2.37348
210	209.97	0.3987	149.69	1512.0	1.34444	590	596.52	15.31	427.15	110.6	2.39140
220	219.97	0.4690	156.82	1346.0	1.39105	600	607.02	16.28	434.78	105.8	2.40902
230	230.02	0.5477	164.00	1205.0	1.43557	610	617.53	17.30	442.42	101.2	2.42644
240	240.02	0.6355	171.13	1084.0	1.47824	620	628.07	18.36	450.09	96.92	2.44356
250	250.05	0.7329	178.28	979.0	1.51917	630	638.63	19.84	457.78	92.84	2.46048
260	260.09	0.8405	185.45	887.8	1.55848	640	649.22	20.64	465.50	88.99	2.47716
270	270.11	0.9590	192.60	808.0	1.59634	650	659.84	21.86	473.25	85.34	2.49364
280	280.13	1.0889	199.75	738.0	1.63279	660	670.47	23.13	481.01	81.89	2.50985
285	285.14	1.1584	203.33	706.1	1.65055	670	681.14	24.46	488.81	78.61	2.52589
290	290.16	1.2311	206.91	676.1	1.66802	680	691.82	25.85	496.62	75.50	2.54175
295	295.17	1.3068	210.49	647.9	1.68515	690	702.52	27.29	504.45	72.56	2.55731
298	298.18	1.3543	212.64	631.9	1.69528	700	713.27	28.80	512.33	69.76	2.57277
300	300.19	1.3860	214.07	621.2	1.70203	710	724.04	30.38	520.23	67.07	2.58810
305	305.22	1.4686	217.67	596.0	1.71865	720	734.82	32.02	528.14	64.53	2.60319
310	310.24	1.5546	221.25	572.3	1.73498	730	745.62	33.72	536.07	62.13	2.61803
315	315.27	1.6442	224.85	549.8	1.75106	740	756.44	35.50	544.02	59.82	2.63280
320	320.29	1.7375	228.42	528.6	1.76690	750	767.29	37.35	551.99	57.63	2.64737
325	325.31	1.8345	232.02	508.4	1.78249	760	778.18	39.27	560.01	55.54	2.66176
330	330.34	1.9352	235.61	489.4	1.79783	780	800.03	43.35	576.12	51.64	2.69013
340	340.42	2.149	242.82	454.1	1.82790	800	821.95	47.75	592.30	48.08	2.71787
350	350.49	2.379	250.02	422.2	1.85708	820	843.98	52.59	608.59	44.84	2.74504
360	360.58	2.626	257.24	393.4	1.88543	840	866.08	57.60	624.95	41.85	2.77170
370	370.67	2.892	264.46	367.2	1.91313	860	888.27	63.09	641.40	39.12	2.79783
380	380.77	3.176	271.69	343.4	1.94001	880	910.56	68.98	657.95	36.61	2.82344
390	390.88	3.481	278.93	321.5	1.96633	900	932.93	75.29	674.58	34.31	2.84856
400	400.98	3.806	286.16	301.6	1.99194	920	955.38	82.05	691.28	32.18	2.87324
410	411.12	4.153	293.43	283.3	2.01699	940	977.92	89.28	708.08	30.22	2.89748
420	421.26	4.522	300.69	266.6	2.04142	960	1000.55	97.00	725.02	28.40	2.92128
430	431.43	4.915	307.99	251.1	2.06533	980	1023.25	105.2	741.98	26.73	2.94468
440	441.61	5.332	315.30	236.8	2.08870	1000	1046.04	114.0	758.94	25.17	2.96770
450	451.80	5.775	322.62	223.6	2.11161	1020	1068.89	123.4	776.10	23.72	2.99034
460	462.02	6.245	329.97	211.4	2.13407	1040	1091.85	133.3	793.36	23.29	3.01260
470	472.24	6.742	337.32	200.1	2.15604	1060	1114.86	143.9	810.62	21.14	3.03449
480	482.49	7.268	344.70	189.5	2.17760	1080	1137.89	155.2	827.88	19.98	3.05608
490	492.74	7.824	352.08	179.7	2.19876	1100	1161.07	167.1	845.33	18.896	3.07732
500	503.02	8.411	359.49	170.6	2.21952	1120	1184.28	179.7	862.79	17.886	3.09825
510	513.32	9.031	366.92	162.1	2.23993	1140	1207.57	193.1	880.35	16.946	3.11883
520	523.63	9.684	374.36	154.1	2.25997	1160	1230.92	207.2	897.91	16.064	3.13916
530	533.98	10.37	381.84	146.7	2.27967	1180	1254.34	222.2	915.57	15.241	3.15916
540	544.35	11.10	389.34	139.7	2.29906	1200	1277.79	238.0	933.33	14.470	3.17888
550	555.74	11.86	396.86	133.1	2.31809	1220	1301.31	254.7	951.09	13.747	3.19834
560	565.17	12.66	404.42	127.0	2.33685	1240	1324.93	272.3	968.95	13.069	3.21751
570	575.59	13.50	411.97	121.2	2.35531						